







Lechner

SOLUTIONS FOR PROFESSIONAL CONSTRUCTION

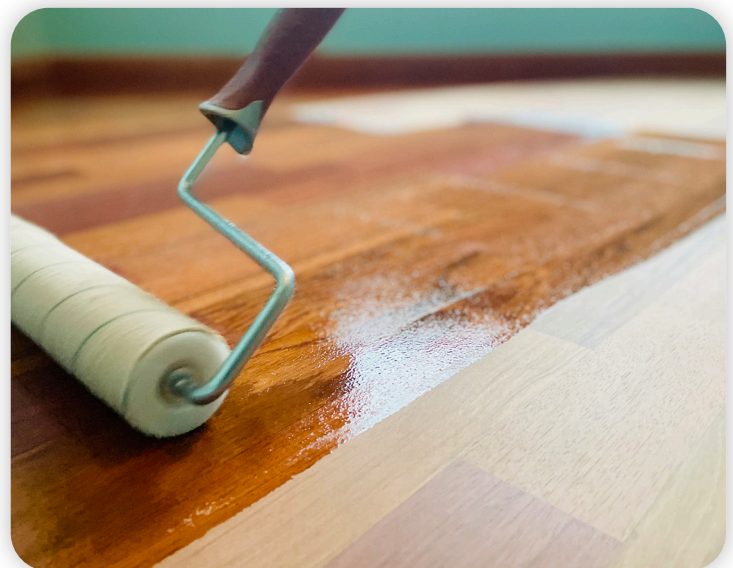

FIELDS OF APPLICATION

-  RESILIENT LINE
-  WOOD LINE
-  MARINE LINE
-  ARTIFICIAL GRASS LINE
-  EQUIPMENT AND ACCESSORIES LINE

DILUENTE CH 400 R

RETARDANT POLYURETHANE THINNER

DESCRIPTION AND USES

PRODUCT FOR PROFESSIONAL USE ONLY

Universal retardant polyurethane thinner, with exceptional solvent power, very slow evaporation. Particularly suitable for Lechner solvent-based polyurethane coatings, at a level of around 5%, in high temperature environments or when it is necessary to delay drying for various reasons.

PRODUCT FEATURES



Additives - Latex



Suitable for indoor use



Storage
24 months in the original sealed packages



Appearance
Liquid



Color
Transparent



Chemical base
Mixture of organic solvents



Operating temperature
+10 - +30 °C

METHOD OF USE

Add around 5% to Lechner solvent-based polyurethane coatings and shake vigorously before application.

INSTRUCTIONS

FOR SAFETY AND DISPOSAL: Consult the relevant safety data sheet before using the product. Protect your hands and eyes during use. Product and its vapors are flammable; keep away from flames, sparks and do not smoke. Ventilate the room during and after use. Follow applicable safety regulations. Do not dispose of any residue into the ground, waterways or drains. For the disposal of the product and other waste deriving from the activity, scrupulously follow the provisions of Legislative Decree 152/2006 and subsequent modifications and integrations (Environmental Consolidation Act). For further information please contact our Technical Assistance Department. The content of this sheet integrates and replaces and cancels the previous one.

WARNINGS: The data provided in this data sheet reflect our best theoretical and practical knowledge. However, since it is not possible for us to go into every detail, such information should not be considered as binding. In cases of doubt, please contact our technical offices.