


SOLUTIONS FOR PROFESSIONAL CONSTRUCTION







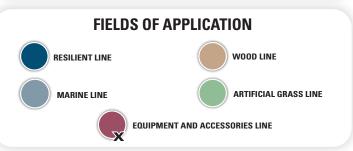

M0401-1 Rev. 4.0

# DILUENTE ECO R

RETARDANT THINNER FOR WATER-BASED COATINGS

# **DESCRIPTION AND USES**

PRODUCT FOR PROFESSIONAL USE ONLY

Retardant thinner for ECO SERIES and COMFORT SERIES coatings, to be used in cases where the open time during application and final drying is to be extended. Especially suitable in high temperature or low humidity conditions. Add around 5% to ECO SERIES and COMFORT SERIES water-based coatings and shake vigorously before application.

# **PRODUCT FEATURES**



Additives - Latex



Suitable for indoor use



**Storage** 24 months in the original sealed packages



**Appearance** Liquid



**Color** Transparent



Chemical base Mixture of solvents



Operating temperature  $+10 - +30 \, ^{\circ}\text{C}$ 

## METHOD OF USE

Add around 5% to ECO SERIES and COMFORT SERIES water-based coatings and <u>shake vigorously before application</u>.

### **INSTRUCTIONS**

FOR SAFETY AND DISPOSAL: Consult the relevant safety data sheet before using the product. Gloves are recommended during use. Ventilate the room during and after use. Follow applicable safety regulations. Do not dispose of any residue into the ground, waterways or drains. For the disposal of the product and other waste deriving from the activity, scrupulously follow the provisions of Legislative Decree 152/2006 and subsequent modifications and integrations (Environmental Consolidation Act). For further information please contact our Technical Assistance Department. The content of this sheet integrates and replaces and cancels the previous one.

**WARNINGS:** The data provided in this data sheet reflect our best theoretical and practical knowledge. However, since it is not possible for us to go into every detail, such information should not be considered as binding. In cases of doubt, please contact our technical offices