




SOLUTIONS FOR PROFESSIONAL CONSTRUCTION



FIELDS OF APPLICATION

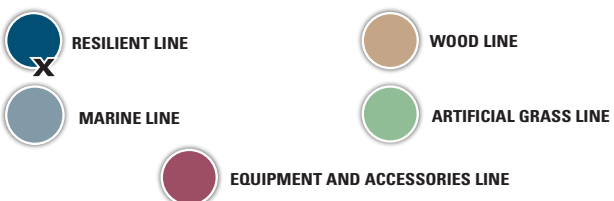

ECOGRIP

ADHESION PRIMER FOR SMOOTHING COATS ON POORLY OR NON-ABSORBENT SUBSTRATES

DESCRIPTION AND USES

PRODUCT FOR PROFESSIONAL USE ONLY

Ready-to-use one-component primer based on acrylic resins in water emulsion, with excellent adhesion power, suitable to help the adhesion of cement-based smoothing coats on poorly or non-absorbent surfaces and on substrates with residues of well-bonded smoothing coats. Suitable as an adhesive on firmly fixed glue residues. It is not suitable for further direct bonding.

PRODUCT FEATURES



Application
Hair roller



Application
Brush



Suitable for internal use



Suitable for heating substrates



Suitable for wheelchairs



Drying time
15-20 minutes on poorly absorbent substrates
45-60 minutes on non-absorbent substrates



Storage
12 months in original sealed packages



Appearance
Liquid



Color
Green



Chemical base
Acrylic resin in water dispersion



Consumption
100-200 g/sqm



Operating temperature
+10 - +30°C



Dilution
Ready to use



Cleaning
Water (as long as the product is fresh)



Susceptible to frost

METHOD OF USE

The substrate must be dry, clean, solid and free of dust and release agents. Cracks, if any, must be resealed in advance with SIGEPOX. Check for rising ground moisture. Shake the product before use for better homogenization, and ECOGRIP is ready to use. Apply ECOGRIP with a hair roller or brush. ECOGRIP must be completely dry before applying next smoothing coat. ECOGRIP is suitable as an adhesion promoter for smoothing coats on substrates treated with epoxy or polyurethane primers. It must be used neat on ceramics, stones, wood and on residues of old adhesives.

OTHER INFORMATION

Do not use in environments with a temperature below +10°C. Follow the instructions provided by the manufacturers of the materials used. The drying times indicated in the characteristics correspond to an ambient temperature of 20°C and a relative air humidity of 50%.

INSTRUCTIONS

FOR SAFETY AND DISPOSAL: Consult the relevant safety data sheet before using the product. Gloves are recommended during use. Ventilate the room during and after use. Follow applicable safety regulations. Do not dispose of any residue into the ground, waterways or drains. For the disposal of the product and other waste deriving from the work carried out, scrupulously comply with the provisions of Legislative Decree no. 152/2006 and subsequent amendments and additions of the Consolidated Environmental Act (Testo Unico Ambientale). For further information please contact our Technical Assistance Department. The content of this sheet integrates and replaces the previous version, rendering it null and void.

WARNINGS: The data provided in this data sheet reflect our best theoretical and practical knowledge. However, since it is not possible for us to go into every detail, such information should not be considered as binding. In cases of doubt, please contact our technical offices.