


SOLUTIONS FOR PROFESSIONAL CONSTRUCTION







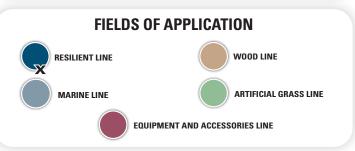

M0401-1 Rev. 4.0

# FLOOR DAY

DETERGENT FOR DAILY CLEANING OF RESILIENT AND CERAMIC FLOORS

## **DESCRIPTION AND USES**

PRODUCT FOR PROFESSIONAL USE ONLY

Neutral pH detergent for fast, no-rinse cleaning of all water-resistant floors. Suitable for all situations where the level of soiling is not high enough to demand a deep clean with rinsing. Leaves the surface shiny, clean and scented.

# **PRODUCT FEATURES**



**Application** Clean cloth



**Application** Spray



**Application** Mop



Suitable for indoor use



**Dilution** Water



**Storage** 36 months in original



Appearance Liquid



**Color** Clear



Chemical base Reg. (EC) No. 648/2004: <5% non-ionic surfactants.



Susceptible to frost

### **METHOD OF USE**

Prepare a 3-5% solution, approximately, in water (30-50 g of FLOOR DAY to a liter of water), before dipping a clean cloth or mop and washing down the surface. In this dilution, FLOOR DAY does not damage the metallic wax film. For fast cleaning of all washable surfaces, the product may be sprayed if diluted at 10-20% with water. May be used with a floor scrubber.

#### INSTRUCTIONS

FOR SAFETY AND DISPOSAL: Consult the relevant safety data sheet before using the product. Gloves are recommended during use. Ventilate the room during and after use. Follow all applicable safety regulations. Do not dispose of any surplus in the ground, waterways or drains. For disposal of the product and other waste derived from its use, adhere closely to the provisions of Legislative Decree no. 152/2006 and subsequent amendments and additions of the Consolidated Environmental Act (Testo Unico Ambientale). For further information, please contact our Technical Assistance Department. The content of this current sheet supplements and replaces the previous version,

rendering it null and void.

**WARNINGS**: The data provided in this technical data sheet reflect our best theoretical and practical knowledge. However, it is not possible for us to consider every detail, therefore this information should not be considered as binding. In the event of any doubt, contact our technical offices.