









SOLUTIONS FOR PROFESSIONAL CONSTRUCTION

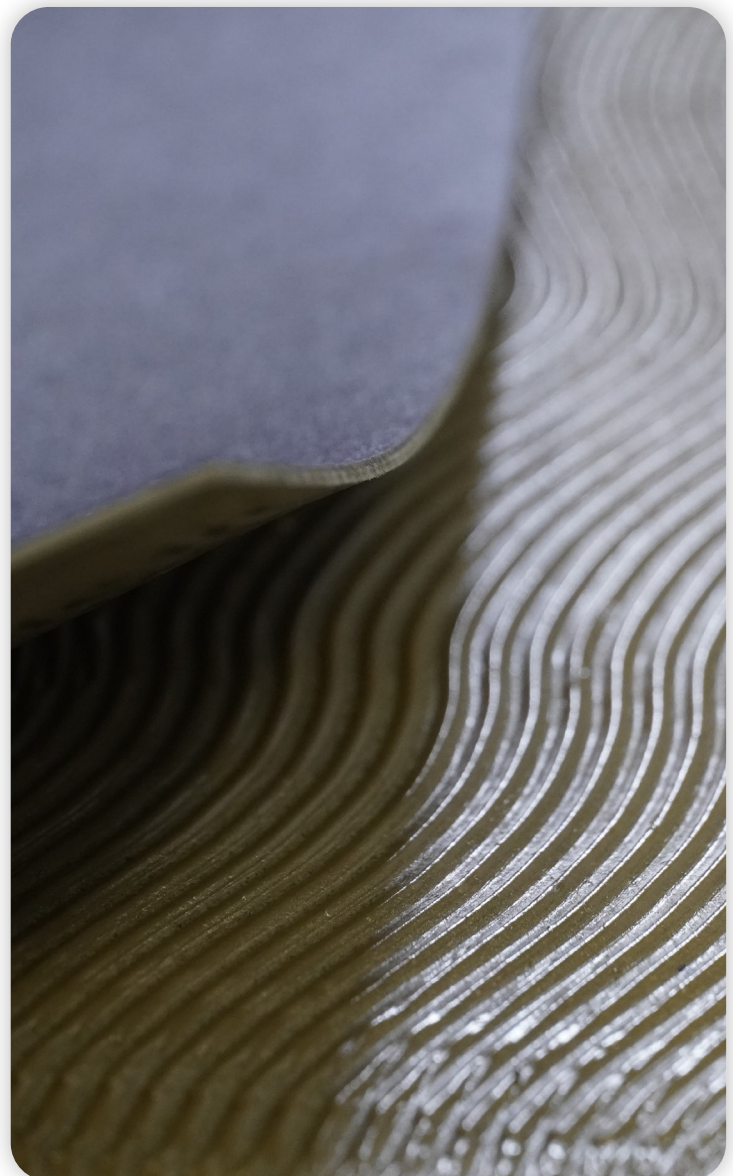

#### FIELDS OF APPLICATION

-  **RESILIENT LINE**
-  **NAVAL LINE**
-  **WOOD LINE**
-  **SYNTHETIC GRASS LINE**
-  **EQUIPMENT AND ACCESSORIES LINE**

# HYCOFIX

ADHESIVE IN AQUEOUS DISPERSION SUITABLE FOR INSTALLING LIGHT WALL COVERINGS

## DESCRIPTION AND USES

PRODUCT FOR PROFESSIONAL USE ONLY

Adhesive based on an aqueous synthetic resin dispersion, suitable for installing light wall coverings of all kinds, vinyl papers, fabrics with or without backing, resinated fabrics, coated plastics or fiberglass fabrics on absorbent substrates.

### PRODUCT FEATURES



**Application**  
Short-hair roller



**Application**  
Lechner toothed trowel no.1



**Suitable for indoor use**



**Waiting time**

10 minutes



**Open time**

30 minutes

**Final setting time**

48 hours



**Appearance**  
Paste



**Color**  
White



**Chemical base**  
Vinyl resin in aqueous emulsion



**Warehousing**  
12 months in original sealed packaging



**Consumption**  
150-200g/m<sup>2</sup>



**Operating temperature**  
+10 - +30 °C



**Susceptible to frost**



**Cleaning**  
Water (as long as the product is fresh)

### CERTIFICATIONS



**Solvent-free product**

### METHOD OF USE

The support must be absorbent, compact, clean, established, permanently dry and free from detaching substances such as oils, waxes, excess dust, etc. Absorbent substrates with an insufficiently flat or uneven laying surface can be leveled with cement-based leveling compounds such as LIVELLANTE 140M after priming the surface with products like PRIMER 99 or PRIMER AC to promote adhesion. Mix the product before use. A few hours before installing the coverings, remove the sheets from the packaging and lay them down loosely to acclimatize them to the environment and relax the tension caused by the packaging.

Before installing, it is recommended to treat the wall to be covered with a coat of PRIMER 99 or PRIMER AC PLUS diluted with water depending on the absorption of the wall. The primer must be allowed to dry. Then apply HYCOFIX as follows:

- on the wall (gypsum or cement) with a fine-toothed LECHNER no. 1 trowel or with a roller, after diluting at 10-15% with water.
- on the back of the coating with a brush after diluting at about 20% with water.

If HYCOFIX has been applied to a wall, the covering should be laid immediately before the adhesive has cured (install one sheet at a time). If HYCOFIX has been applied to the back of the covering, allow it to "macerate" for about 10-20 minutes before applying it to the wall. The surface should be massaged with a brush or a wooden trowel (or similar) immediately after the covering has been installed, starting from the center outwards, to allow a perfect wetting and to remove any air bubbles.

Consumption varies depending on the uniformity of the wall or reverse of the covering.

### OTHER INFORMATION

The drying times indicated in the product features correspond to an ambient temperature of +20°C and a relative air humidity of 50%. Avoid exposure to excessively high and low temperatures.

### INSTRUCTIONS

**FOR SAFETY AND DISPOSAL:** Consult the relevant safety data sheet before using the product. Gloves are recommended during use. Ventilate the room during and after use. Follow all applicable safety regulations. Do not dispose of any residue in the ground, waterways or drains. To dispose of the product and other waste deriving from the activity, adhere closely to the provisions of Legislative Decree no. 152/2006 and subsequent amendments and additions of the Consolidated Environmental Act (Testo Unico Ambientale). For further information, please contact our Technical Assistance Department. The content of this sheet integrates and replaces the previous version, rendering it null and void.

**WARNINGS:** The data provided in this data sheet reflects our best theoretical and practical knowledge. However, it is not possible for us to consider every detail, therefore this information should not be considered as binding. In the event of any doubt, please contact our technical offices.