


Lechner

SOLUTIONS FOR PROFESSIONAL CONSTRUCTION



FIELDS OF APPLICATION

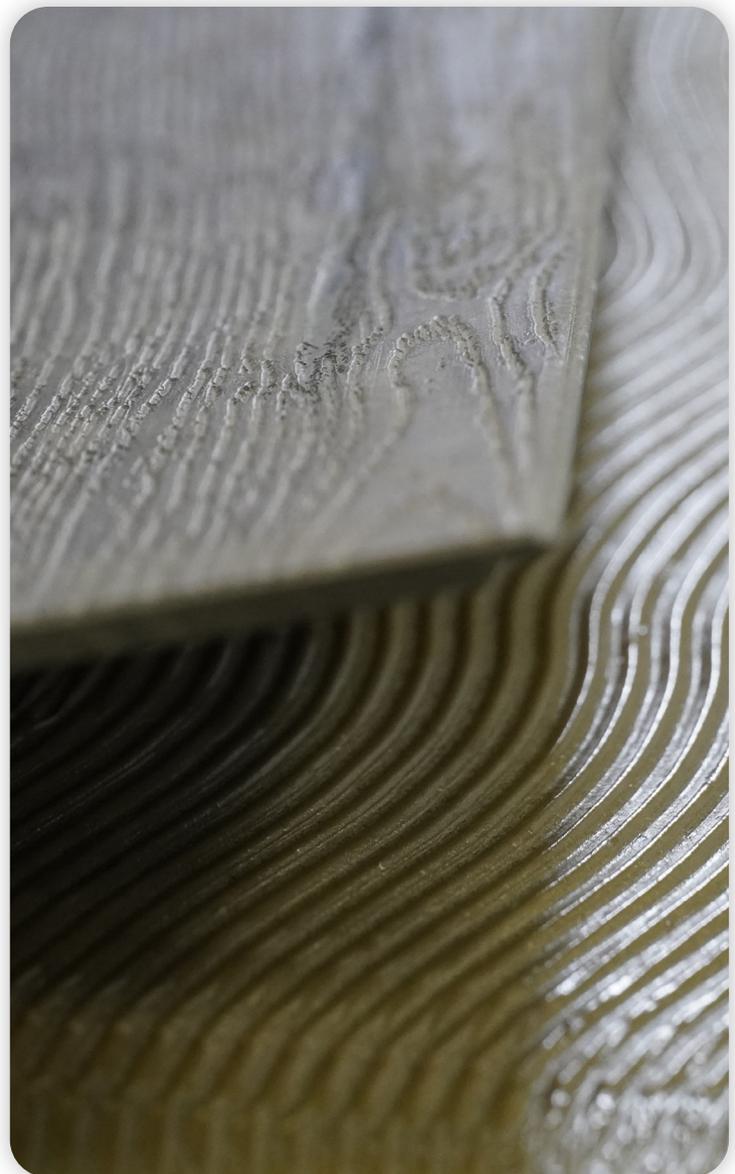

RESILIENT LINE



WOOD LINE



MARINE LINE



ARTIFICIAL GRASS LINE



EQUIPMENT AND ACCESSORIES LINE

HYCOL KD FIBER

HIGH-PERFORMANCE FIBER-REINFORCED ACRYLIC ADHESIVE FOR INSTALLING LVT FLOORING

DESCRIPTION AND USES

PRODUCT FOR PROFESSIONAL USE ONLY

Fiber-reinforced acrylic adhesive in aqueous dispersion, ideal for installing LVT flooring tiles and planks. Particularly suitable for gluing homogeneous and heterogeneous PVC sheets and tiles, and rubber civil flooring, on absorbent or non-absorbent substrates subject to particularly intense static and dynamic loads.

PRODUCT FEATURES



Application

Lechner toothed trowel no. 1- no. 2



Suitable for indoor use



Suitable for under-floor heating systems



Suitable for wheelchairs

Waiting time

from 10 to 80 mins depending on the absorbency of the substrate

Open time

40 to 80 mins depending on the absorbency of the substrate

Dry-to-walk-on time

6 hours

Final setting time

48-72 hours



Storage

12 months in original sealed packaging



Appearance

Paste



Color

White



Chemical base

Acrylic resin in aqueous emulsion and synthetic fibers



Consumption

300-400 g/m²



Operating temperature

+10 - +30 °C



Cleaning

Water (as long as the product is fresh)



Susceptible to frost

CERTIFICATIONS



Solvent-free product

METHOD OF USE

The substrate must be absorbent, compact, in good condition, established, permanently dry and free from detaching substances such as oils, waxes, excess dust, etc. If there are any cracks or fissures, these must be first repaired with SIGEPOX. Maximum allowable moisture content:

- Cementitious substrates: max. 2.0%; with underfloor heating 1.7%.
- Gypsum or anhydrite substrates: max. 0.5%; with underfloor heating 0.2%.

It is recommended to check that there is no rising moisture. If surfaces are dusty, insufficiently compact or highly absorbent, they should be treated in advance with the appropriate primers, such as PRIMER 99 or PRIMER AC PLUS. An insufficiently flat or uneven laying surface can be leveled with cement-based leveling compounds, such as LIVELLANTE 140 M, RASODUR MAXI, ULTRADUR, LEVELFAST or LEVELFAST S after priming the surface with PRIMER 99 for absorbent substrates, and ECOGRIP or ECOGRIP PLUS for poorly or non-absorbent substrates. Non-heating substrates that still have an excessive degree of residual moisture (max. 5%) when the flooring is laid must be sealed with appropriate primers, such as: PU series, EPOPRIMER or TRIX, depending on the absorbency of the surface, sanded and then smoothed with a minimum thickness of at least 2-3 mm. In this case, it is necessary to spread plenty of dry siliceous sand of a suitable grain size (0.5-1 mm) on the last coat of waterproof treatment while it is still fresh, subsequently removing any excess sand not anchored after the primer has dried, to ensure good anchorage of the skim coat to the substrate. Heating substrates can be reinforced but not waterproofed. Mix the product before use. Apply the adhesive on the substrate using an appropriately sized notched trowel, incorporating any residual surface dust. Wait for the adhesive to partially dry, about 10 minutes on absorbent substrates and 80 minutes on non-absorbent substrates. Then proceed to glue the sheets or tiles onto the adhesive, which must still be able to wet the back of the flooring; massaging them and applying even pressure over the entire surface to ensure full contact with the adhesive. Once the floor has been glued, it must be massaged from the center outwards to improve adhesion and eliminate any air bubbles.

OTHER INFORMATION

A few hours before laying, remove the flooring or wall covering to be glued from its packaging, laying it on the floor to reduce its tension and allow it to acclimatize to the working environment. The application and gluing times indicated in the product features correspond to an ambient temperature of +20°C and a relative air humidity of 50%. Store the product at the temperatures of the desired rooms and avoid exposure to excessively high and low temperatures.

INSTRUCTIONS

FOR SAFETY AND DISPOSAL: Consult the relevant safety data sheet before using the product. Gloves are recommended during use. Ventilate the room during and after use. Follow all applicable safety regulations. Do not dispose of any residue in the ground, waterways or drains. To dispose of the product and other waste deriving from the activity, adhere closely to the provisions of Legislative Decree no. 152/2006 and subsequent amendments and additions of the Consolidated Environmental Act (Testo Unico Ambientale). For further information, please contact our Technical Assistance Department. The content of this sheet integrates and replaces the previous version, rendering it null and void.

WARNINGS: The data provided in this data sheet reflects our best theoretical and practical knowledge. However, it is not possible for us to consider every detail, therefore this information should not be considered as binding. In the event of any doubt, please contact our technical offices.