







# Lechner

SOLUTIONS FOR PROFESSIONAL CONSTRUCTION

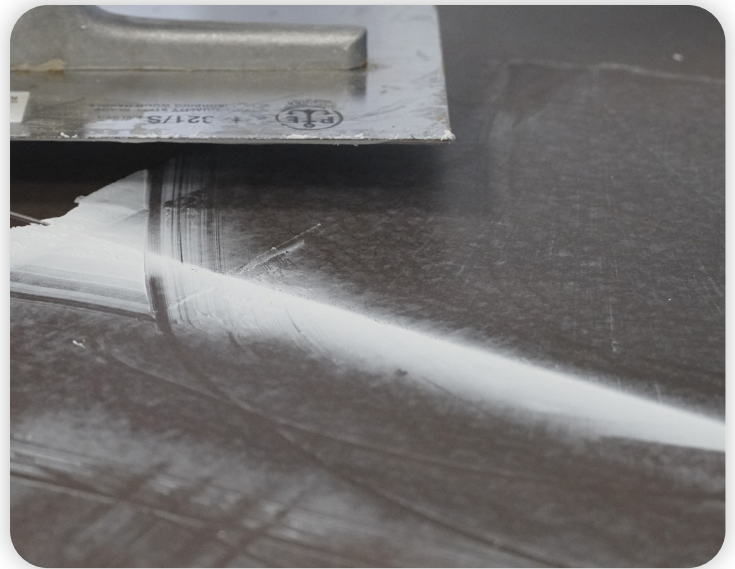

## FIELDS OF APPLICATION

-  RESILIENT LINE
-  WOOD LINE
-  MARINE LINE
-  ARTIFICIAL GRASS LINE
-  EQUIPMENT AND ACCESSORIES LINE

# RASOPAST 105

READY-TO-USE PASTE SKIM COAT FOR THICKNESSES UP TO 2 MM PER COAT

## DESCRIPTION AND USES PRODUCT FOR PROFESSIONAL USE ONLY

Ready-to-use paste product in water dispersion, suitable for skim coat of low-absorbent cementitious subfloors, ceramic, marble, Palladian, porcelain stoneware and wood panel floors. Suitable as adhesion agent for successive cement-based skim coats on particularly smooth surfaces. Maximum allowable thickness: 2 mm per coat.

### PRODUCT FEATURES



**Application**  
Metal spatula



**Suitable for indoor use**



**Suitable for heating substrates**



**Suitable for wheelchairs**



**Dry-to-walk-on time**

60-90 min.

**Drying time**

2-3 hours



**Storage**

12 months in the original sealed packages



**Chemical base**

Synthetic resins in water dispersion and selected aggregates



**Consumption**

1.2 kg/m<sup>2</sup>/mm



**Thickness per coat**

up to 2 mm



**Operating temperature**

+10 - +30 °C



**Cleaning**

Water (as long as the product is fresh)

### CERTIFICATIONS



**Solvent-free product**

### METHOD OF USE

Substrates must be compact, free of cracks, free of dust, clean and dry. RASOPAST 105 has excellent adhesion to poorly absorbent or very smooth surfaces such as ceramic, porcelain stoneware, marble, etc., provided they are thoroughly cleaned. Therefore, it does not require prior treatment with primer. Spread the product to the desired thickness (maximum 2 mm per coat) with a metal spatula, taking care to avoid exposing the product to direct sunlight or strong air currents during the drying phase. It is not suitable for leveling on permanently wet surfaces, for direct laying of wood floors, for direct gluing with solvent or two-component adhesives, for direct gluing with water-based glues of poorly or non-breathable materials. In this case, it is necessary to level over the RASOPAST 105 with a cement-based leveling compound for a minimum thickness of at least 2 mm.

### OTHER INFORMATION

The drying times indicated in the characteristics correspond to an ambient temperature of +20°C and a relative air humidity of 50%. RASOPAST 105 is also available in fine grain size.

### INSTRUCTIONS

**FOR SAFETY AND DISPOSAL:** Consult the relevant safety data sheet before using the product. Gloves are recommended during use. Ventilate the room during and after use. Follow applicable safety regulations. Do not dispose of any residue into the ground, waterways or drains. For the disposal of the product and other waste deriving from the activity, scrupulously follow the provisions of Legislative Decree 152/2006 and subsequent modifications and integrations (Environmental Consolidation Act). For further information please contact our Technical Assistance Department. The content of this current sheet supplements and replaces the previous version, rendering it null and void.

**WARNINGS:** The data provided in this data sheet reflect our best theoretical and practical knowledge. However, since it is not possible for us to go into every detail, such information should not be considered as binding. In cases of doubt, please contact our technical offices.