







Lechner

SOLUTIONS FOR PROFESSIONAL CONSTRUCTION

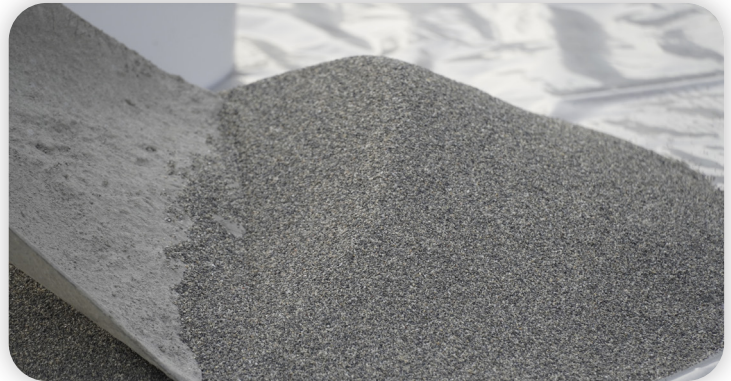

FIELDS OF APPLICATION

-  RESILIENT LINE
-  WOOD LINE
-  MARINE LINE
-  ARTIFICIAL GRASS LINE
-  EQUIPMENT AND ACCESSORIES LINE

QUARTZ SAND

DRIED SAND WITH A GRAIN SIZE OF 0.5-1 MM TO BE SPRINKLED ON SUBSTRATES TREATED WITH POLYURETHANE OR EPOXY PRIMER

DESCRIPTION AND USES PRODUCT FOR PROFESSIONAL USE ONLY

Dried sand with a grain size of 0.5-1 mm to be sprinkled on substrates treated with polyurethane or epoxy primers (PRIMER PU, PRIMER PU 300, PRIMER PU 150 SPEED, PRIMER PU 50+ SPEED or EPOPRIMER) to facilitate the adhesion of subsequent skim coats. Suitable for the preparation of synthetic mortars (suitably mixed with a primer, as indicated in the relative technical data sheets) and/or for significantly thick applications added to the skim coats. For indoor and outdoor use.

PRODUCT FEATURES



Chemical base
Natural quartz sand



Storage
24 months in original sealed packaging



Consumption
Depending on usage

METHOD OF USE

As a dusting sand: sprinkle the sand on flooring that has been treated with primer while it is still fresh until it no longer sinks into the fresh surface and instead creates a sandy surface. After the primer has fully cured, remove excess unanchored sand with a hard brush.

As an addition for leveling compounds: mix the leveling compound with the mix water and then add the sand up to a maximum of 30%. Mix well until the mixture reaches the desired consistency and is free of any lumps.

To prepare synthetic mortars: mix with epoxy or polyurethane primers (EPOPRIMER, PRIMER PU series) until the resulting mortar reaches the desired consistency, following the instructions provided by the relative technical data sheets.

OTHER INFORMATION

In addition to the information provided in this data sheet, the manufacturers' installation instructions for the materials used should always be consulted.

INSTRUCTIONS

FOR SAFETY AND DISPOSAL: Consult the relevant safety data sheet before using the product. Gloves are recommended during use. Ventilate the room during and after use. Follow all applicable safety regulations. Do not dispose of any residue in the ground, waterways or drains. To dispose of the product and other waste deriving from the activity, adhere closely to the provisions of Legislative Decree no. 152/2006 and subsequent amendments and additions of the Consolidated Environmental Act (Testo Unico Ambientale). For further information, please contact our Technical Assistance Department. The content of this sheet integrates and replaces the previous version, rendering it null and void.

WARNINGS: The data provided in this data sheet reflects our best theoretical and practical knowledge. However, it is not possible for us to consider every detail, therefore this information should not be considered as binding. In the event of any doubt, please contact our technical offices.